

## MAKO- ferrailleur 55 tonnes



### Specifications:

1. Throat Depth:	8"
2. Open Height:	13-12"
3. Closed Height w/o Die Block:	9-1/4"
4. Stroke Length:	4-1/4"
5. Plate Table Size (D x W):	10" x 17"
6. Punch:	55 tons
• Max. Material:	13/16"-3/4"
• Max. Hole (Special Tooling):	5"-1/8"
7. Plate Shear:	15-1/2" Long
• W/ fixed hold down:	1" x 4" / 3/4" x 10" / 5/8"x15"
8. Angle Shear:	5" x 5" x 3/8"
• w/ special blade:	4" x 4" x 1/2"
9. Bar Shear:	
• Round (min. to max.):	1/4" to 1-1/2"
• Square (min. to max.):	1/2" to 1"
10. Coper Notcher:	56 tons/ Max: 2-3/4" x 4" x 1/4"
11. Bending Attachment:	8" (Optional Length: 12", 14", 24")
12. Punch End (stroke per/min):	60@ 1/2" (per/min)
13. Hydraulic Pump GPM:	10.5 / System R/V PSI: 2700 psi
14. Fluid Capacity (std.):	20
15. Motor:	10HP 3PH
16. Dimension (W x L x H):	24" x 66" x 60"
17. Weight (Gross/Net):	2750 / 2600 lbs

### Outstanding Features:

- Various Ironwork applications on 4 workstations:



#### Shear Station:

1. Plate Shearing, come w/ fixed hold down.
2. Bar Shearing
3. Angle Iron Shearing.

- Complete punching attachment w/ stripper:



Urethane Stripper

- Automatic urethane hold-downs on angle, plate and bar shearing.




- 10 Punch and die sets (14 w/ IW-55).
- Front and rear 5 position joystick controls (electrical) with jog up & down, fast up & down and neutral.
- Coupling Wrench.



# Équipements de sécurité inclus

## Ferrailleur 55 tonnes

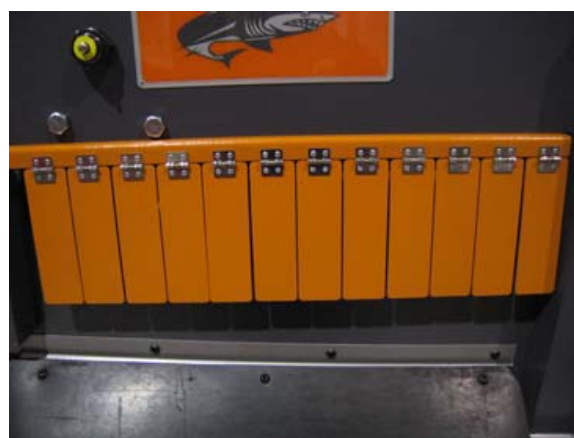

**Outillage  
Industriel  
Québec Itée**

395, rue Marconi Québec (Québec) G1N 4A5  
Tél. : 418.683.2527 / 800.463.5089 Fax : 418.681.8979  
[www.quebecindustriel.com](http://www.quebecindustriel.com)